



Epulse100 Connectors

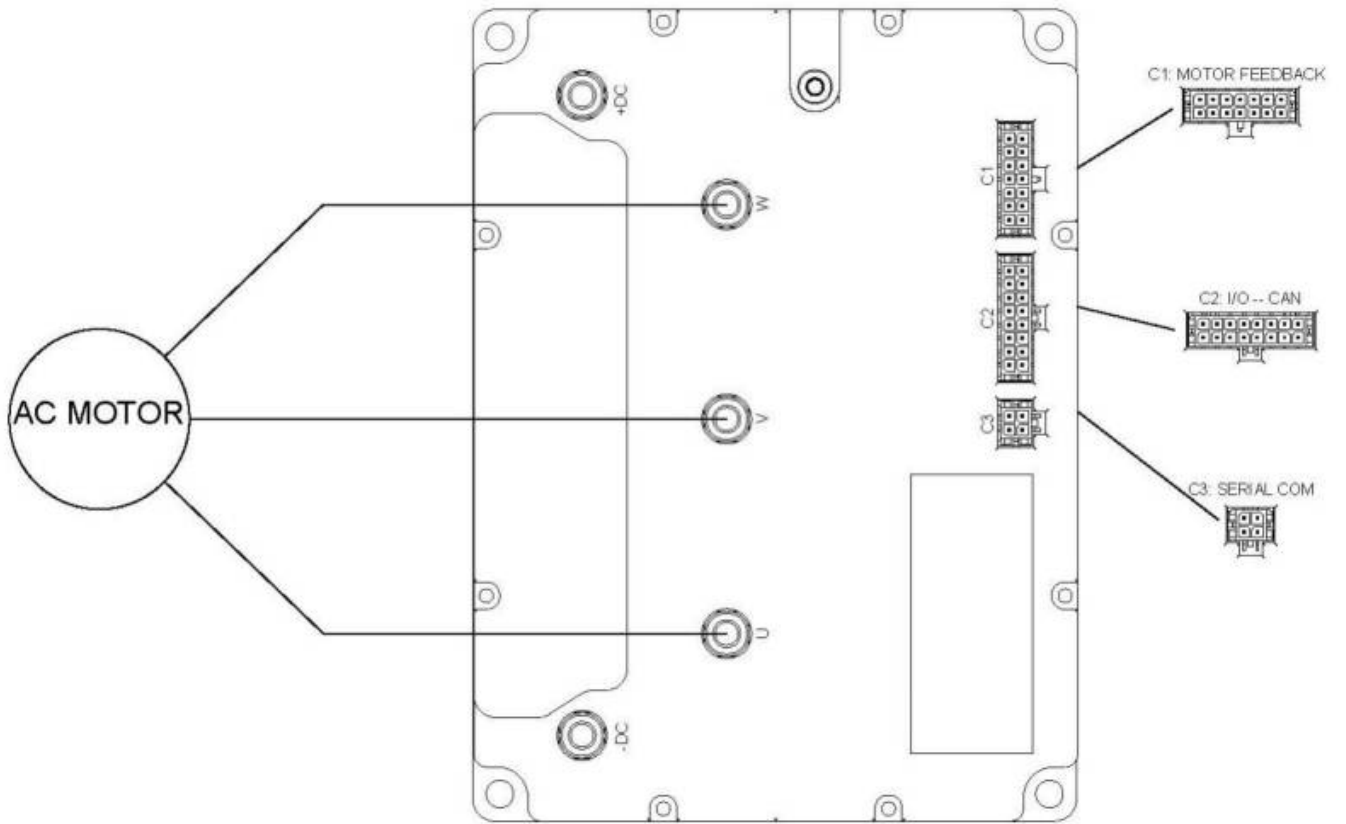

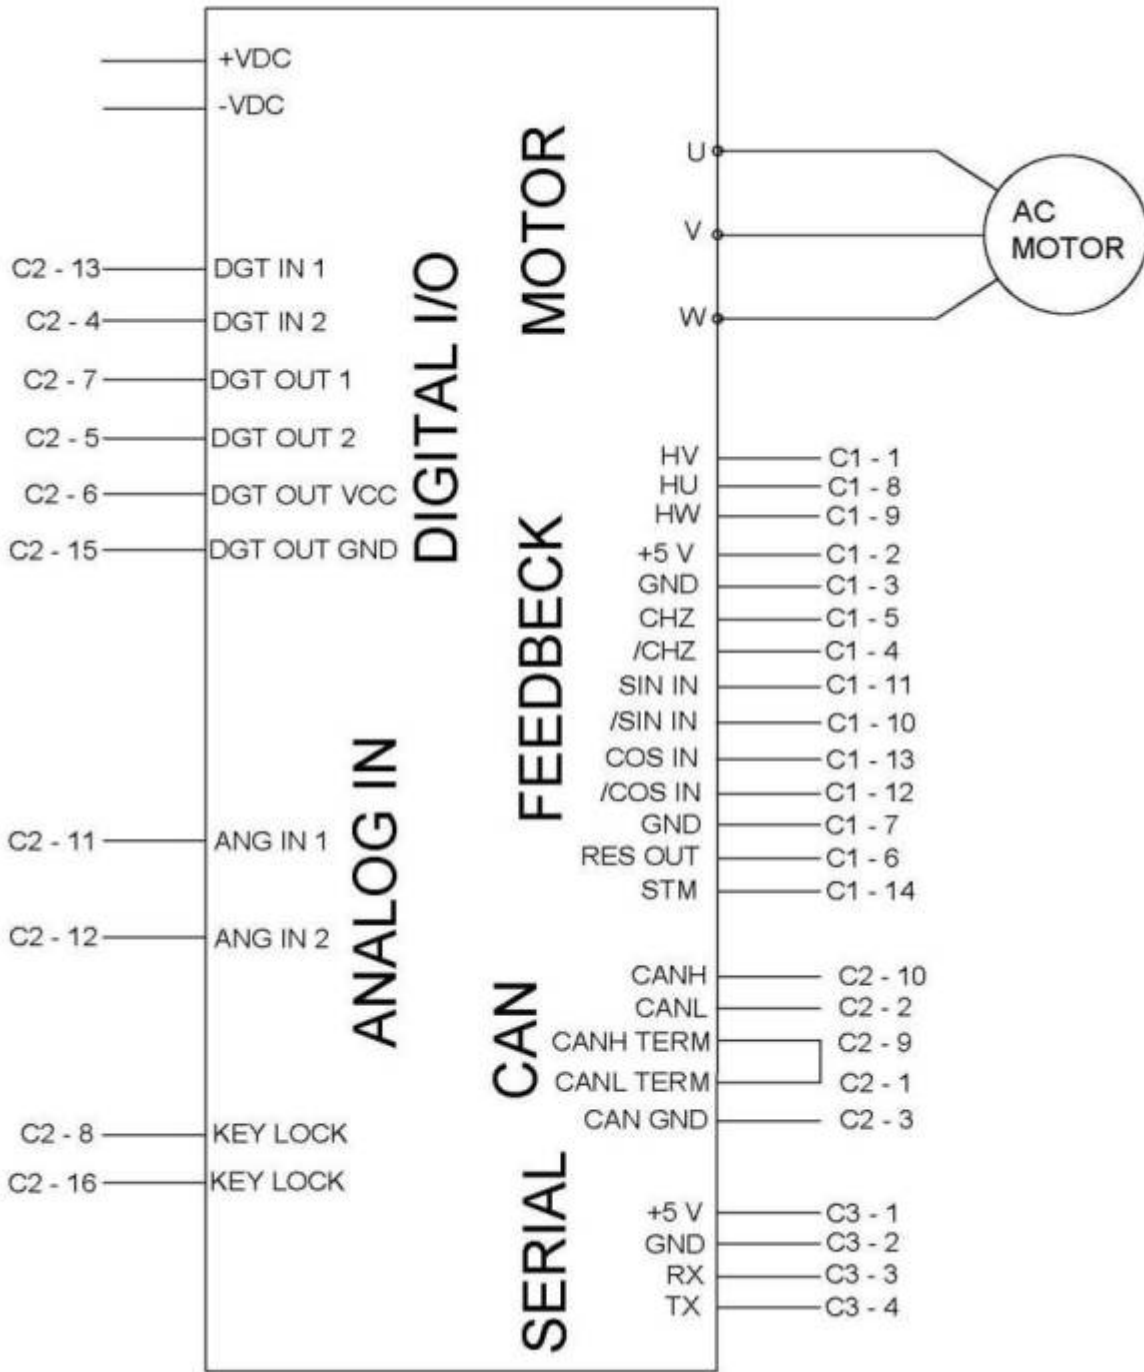

Connector types

| Port | Ordering Code | Brand | Description |
|------|-----------------|-------|--|
| C3 | 43025-0400 | Molex | 4 poles male, for serial communication (Receptacle Housing) |
| C2 | 43025-1600 | Molex | 16 poles male, for input/output/can (Receptacle Housing) |
| C1 | 43025-1400 | Molex | 14 poles male, for motor feedback (Receptacle Housing) |
| - | 43030-0007 | Molex | Crimp Terminal, 20-24 AWG |
| - | 79758-0010 | Molex | pre-Crimped Lead Micro-Fit 3.0 Female-to-Micro-Fit 3.0 Female Tin Plated, 300mm, 20AWG |
| - | 11-03-0043 | Molex | Etraction tool |
| - | TTL-232R-3V3-WE | NiLAB | UART/TTL3V3 Converter |

From:
<https://dokuwiki.nilab.at/> - **NiLAB GmbH**
Knowledgebase

Permanent link:
https://dokuwiki.nilab.at/doku.php?id=epulse50_dc_servodrive:connectors_100

Last update: **2024/07/30 14:02**

