

Servo drive Xtrapulspack Easy

Per configurare il drive per lavorare con NILAB, vedi questa pagina:

https://www.nilab.at/dokuwiki/doku.php?id=green_drive_motors:xtrapulspack

Software per la parametrizzazione del drive:

<https://www.nilab.at/download/gemdrive-studio-5-36-infranor-drive/?wpdmdl=7376&refresh=67a1d90a4104f1738660106>

Per il controllo usando il fieldbus CANopen scarica l'EDS qui: [:miniature_motors:eds_file_easy-ak_v1.31.zip](#)

Comunicazione seriale e CANopen - Pinout connettore X5

Convertitore USB a RS232 suggerito: https://ftdichip.com/products/usb-rs232-we-1800-bt_0-0/


SUB D 9 pin male connector

PIN	FUNCTION	REMARKS
1	Termination resistor	Connect X5.1 to X5.7 to enable the termination resistor
2	CAN-L	Line CAN-L (dominant low)
3	GND	GND signal for CAN communication
4	TXD	Transmit data RS-232
5	GND	GND (shield connection if no 360° connection on the connector). 360° shield connection is highly recommended.
6		Reserved
7	CAN-H	Line CAN-H (dominant high)
8	RXD	Receive data RS-232
9		Reserved

Default parameters for the CANopen bus are:

- Transmission speed of 1 Mb/s,
- Address set at 1,

Collegamenti motore e feedback

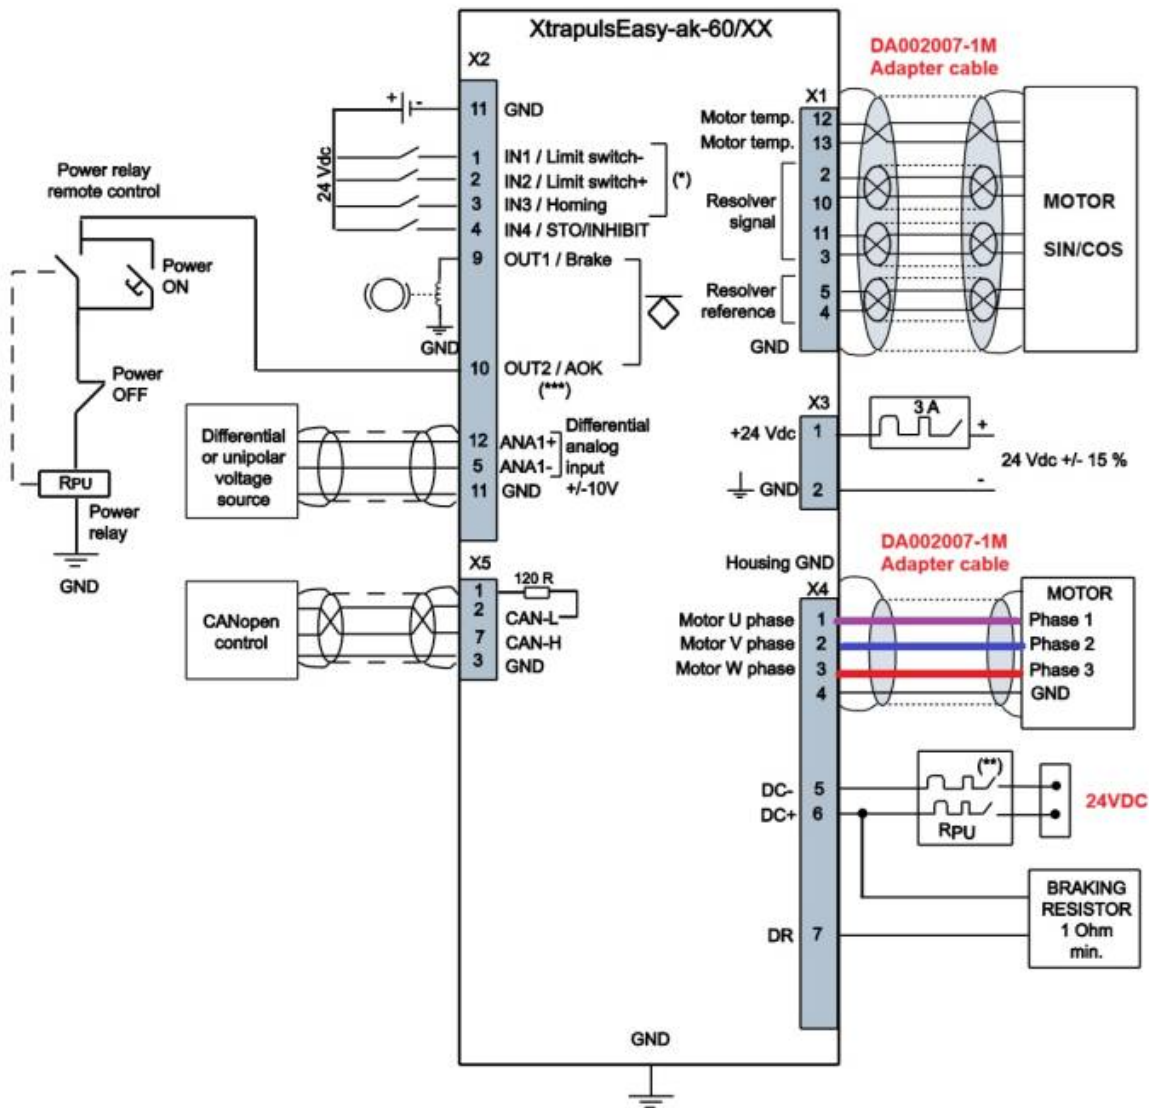

Dimensioni meccaniche e posizione connettori del servo drive



From:

<https://dokuwiki.nilab.at/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://dokuwiki.nilab.at/doku.php?id=it:miniature_motors:xtrapulseasy

Last update: **2026/09/11 23:24**

