


# Connector pinout

The motors are equipped with 5 meters cable with D-SUB 9 female connector.



## Connector Pinout

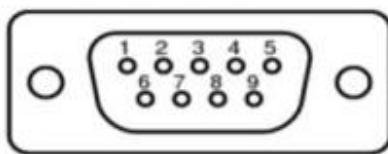

Pin	Signal	Description
1	SIN+	Encoder Sine +
2	SIN-	Encoder Sine -
3	COS+	Encoder Cosine +
4	COS-	Encoder Cosine -
5	U	Motor phase U
6	V	Motor phase V
7	W	Motor phase W
8	+5VDC	Encoder Power Supply
9	GND	Encoder GND

From:

<https://dokuwiki.nilab.at/> - NiLAB GmbH

Knowledgebase

Permanent link:

[https://dokuwiki.nilab.at/doku.php?id=miniature\\_motors:pinout](https://dokuwiki.nilab.at/doku.php?id=miniature_motors:pinout)

Last update: 2023/09/21 07:16

