


ULCO 44


Performance in a small size, ideal for small power application with limited space. Good load rating.



Mechanical Drawing

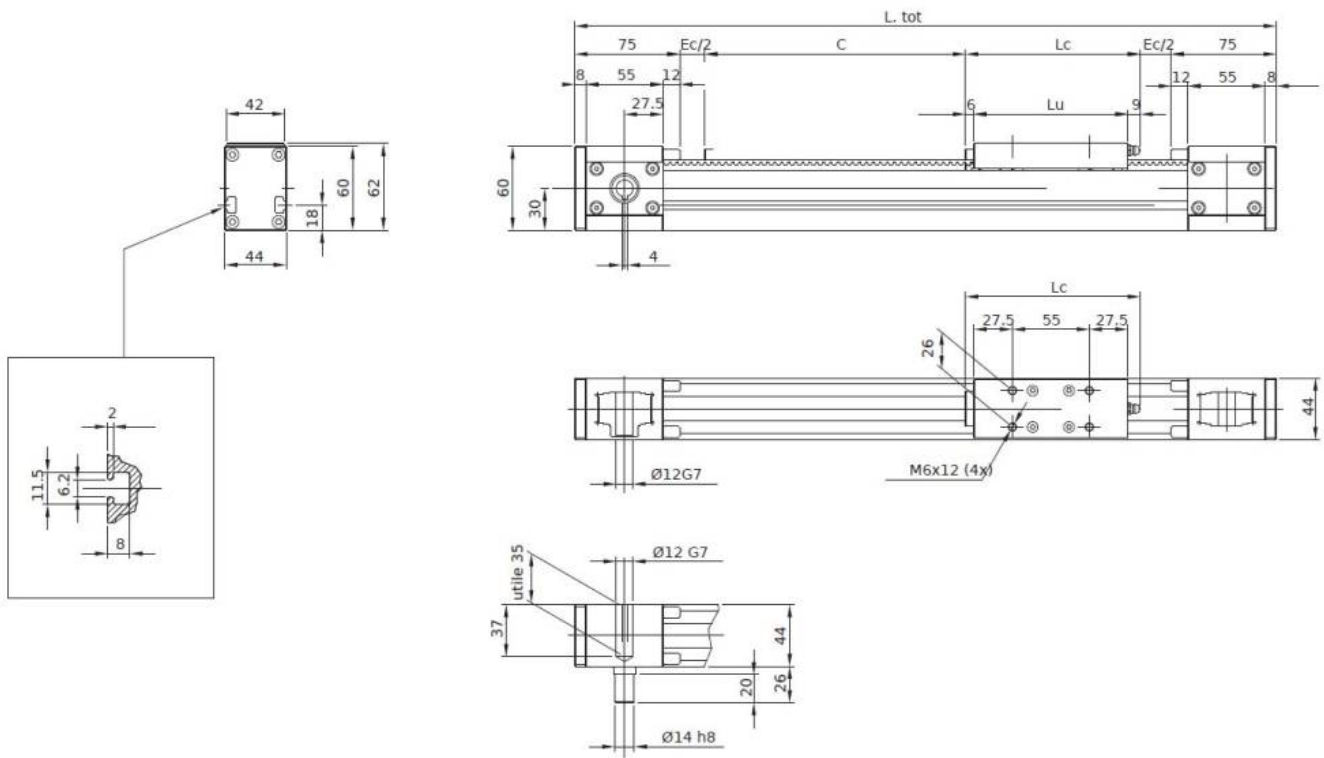

Load rating

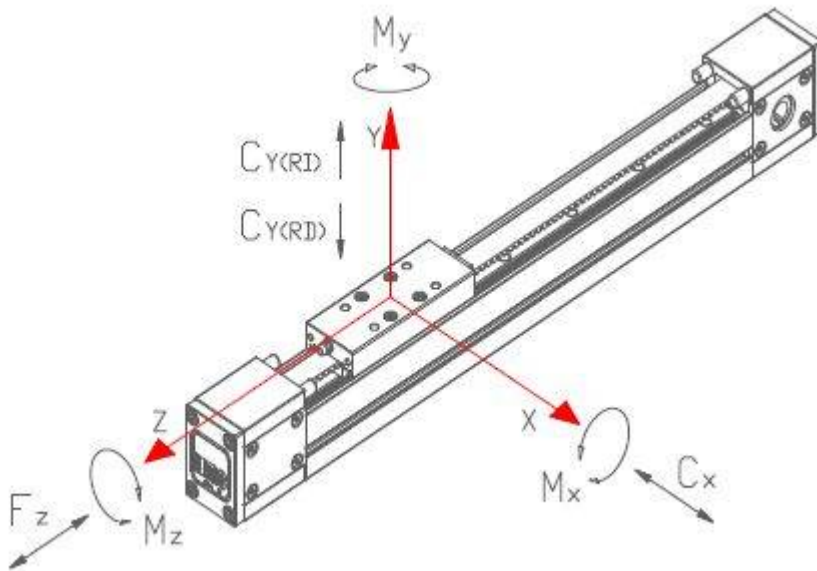

Fz [daN]	Cx [daN]	Cy [daN] (*)	C _{ox} [daN]	C _{oy} [daN] (*)	M _{ox} [daNm]	M _{oy} [daNm]	M _{oz} [daNm]
105	1190	1190↓ 1190↑	1932	1932↓ 1932↑	7,3	7,3	10,1

Technical data

Parameter	Symbol	Value	Unit
Max usable stroke		6500	mm

Total lenght	Ltot	C+Lc+210	mm
Carriage length	Lc	125	mm
Carriage usable length	Lu	110	mm
Extra-stroke (safety)	Ec	60	mm
Max speed		250	m/min
Max acceleration		100	m/sec ²
Position repeatability		< 0.05	mm
Aluminium profile section		44 x 43	mm
Inertia momentum of aluminium profile	Ix	93110	mm ⁴
Inertia momentum of aluminium profile	Iy	162710	mm ⁴
Type of mechanic		linear guide with compact block	
Belt type		Poliuretán HTD-5M-17	
Pulley teeth number		24	
Diameter		38,2	mm
Linear movement per rotation		120	mm
Operating temperature		-20 / +60	degrees

From:
<https://dokuwiki.nilab.at/> - **NiLAB GmbH**
Knowledgebase

Permanent link:
<https://dokuwiki.nilab.at/doku.php?id=ulco:ulco-44>

Last update: **2025/07/24 13:18**

